



LET'S BUILD A BETTER FUTURE


 Pergola
MB-OPENSKY 120

THE MOST ROBUST IN ITS CLASS


The structure of the **MB-OpenSky 120** system is designed in consultation with facade design experts resulting in an extremely durable and robust product.

The pergola columns are made of high-strength extruded aluminium profiles, with a geometry that gives exceptional rigidity to the entire structure.

The use of an innovative method of fitting profiles has ensured the stability of the entire system, as well as aesthetically pleasing connections with invisible gaps.



Columns of square section
with a dimension of 120 mm in width



Edge purlin with dimensions
of 120x190 mm



Power transmission mechanism with automatic adjustment system - quick installation and easy slat adjustment

Special rafter revision to allow installation of radiant heaters

Gabled drainage system - effective drainage of rainwater from the roof inside the entire column surface

Robust construction and highly aesthetic connections

Roof module made up of slats - extremely smooth change of angle of inclination in axis from 0 to 135°

A motor is aesthetically concealed in the design

Two available shapes of slats: SLIM (Z type) and STANDARD (FLAT type)

Option to mount the intermediate column to the finished structure

Aesthetically concealed articulated consoles for easy installation

EVERY DETAIL IS CONSIDERED



COMPACT AND RELIABLE

The roofing of the **MB-Opensky 120** pergola is a module made up of movable slats, equipped with a mechanism enabling smooth change of its inclination angle from 0 to 135° on the axis. The range includes slats in two shapes: SLIM (Z type) and STANDARD (FLAT type).

Due to their design, they allow the roof to be sealed tightly. In addition, they have been fitted with special sealing gaskets to provide additional protection against rainwater.

The transmission mechanism, equipped with an automatic adjustment system, allows rapid installation on-site and easy and problem-free adjustment of the individual slats.



Roof slat STANDARD with dimensions
40x216,5 mm



Roof slat SLIM with dimensions
49x238 mm

ROBUST UNDER ALL CONDITIONS

The clever design of the **MB-OpenSky 120** pergola makes it durable and resistant to weather conditions. The product has been equipped with a gabled drainage system, allowing rainwater to be effectively drained from the roof inside the entire surface of the column.

Tests have shown that for maximum dimensions, i.e. **length 6 m × width 4 m × height 3 m**, the product meets the following strength parameters:



snow load **up to 72 kg/m²***



wind load **up to 110 km/h**








water discharge capacity of **up to 57 l/min**

* In the event of heavy snowfall, it is recommended to clear snow from the roof.






PERFECT DESIGN FEATURES

-  An option to use side screens such as sliding glass panels and/or screens
-  LED lighting available: linear for SLIM slats or punctual for STANDARD slats and along the outline of the structure
-  option of installing radiant heaters,
-  versatility for SMART control applications,
-  the pergola structure can be varnished in any RAL colour.

Standard colours of pergola **MB-OpenSky 120** construction

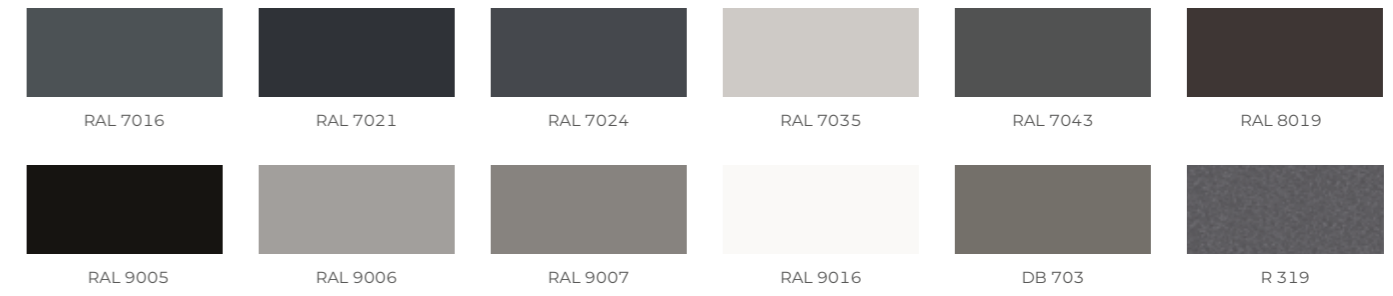

Basic colour range includes matt or structural coatings.
The colours shown above are for illustrative purposes only, and the actual appearance may differ from the colour shown in photographs.





Download the folder
to your device

ALUPROF

ALUMINIUM SYSTEMS

ALUPROF SA Plant in Bielsko-Biała, ul. Warszawska 153, 43-300 Bielsko-Biała, Poland
tel. +48 33 81 95 300, fax +48 33 82 20 512, e-mail: aluprof@aluprof.eu

ALUPROF SA Plant in Opole, ul. Goławicka 3, 45-446 Opole, Poland
tel. +48 77 400 00 00, fax +48 77 400 00 06, e-mail: opole@aluprof.eu



www.aluprof.com